


5-1 Exploded Views

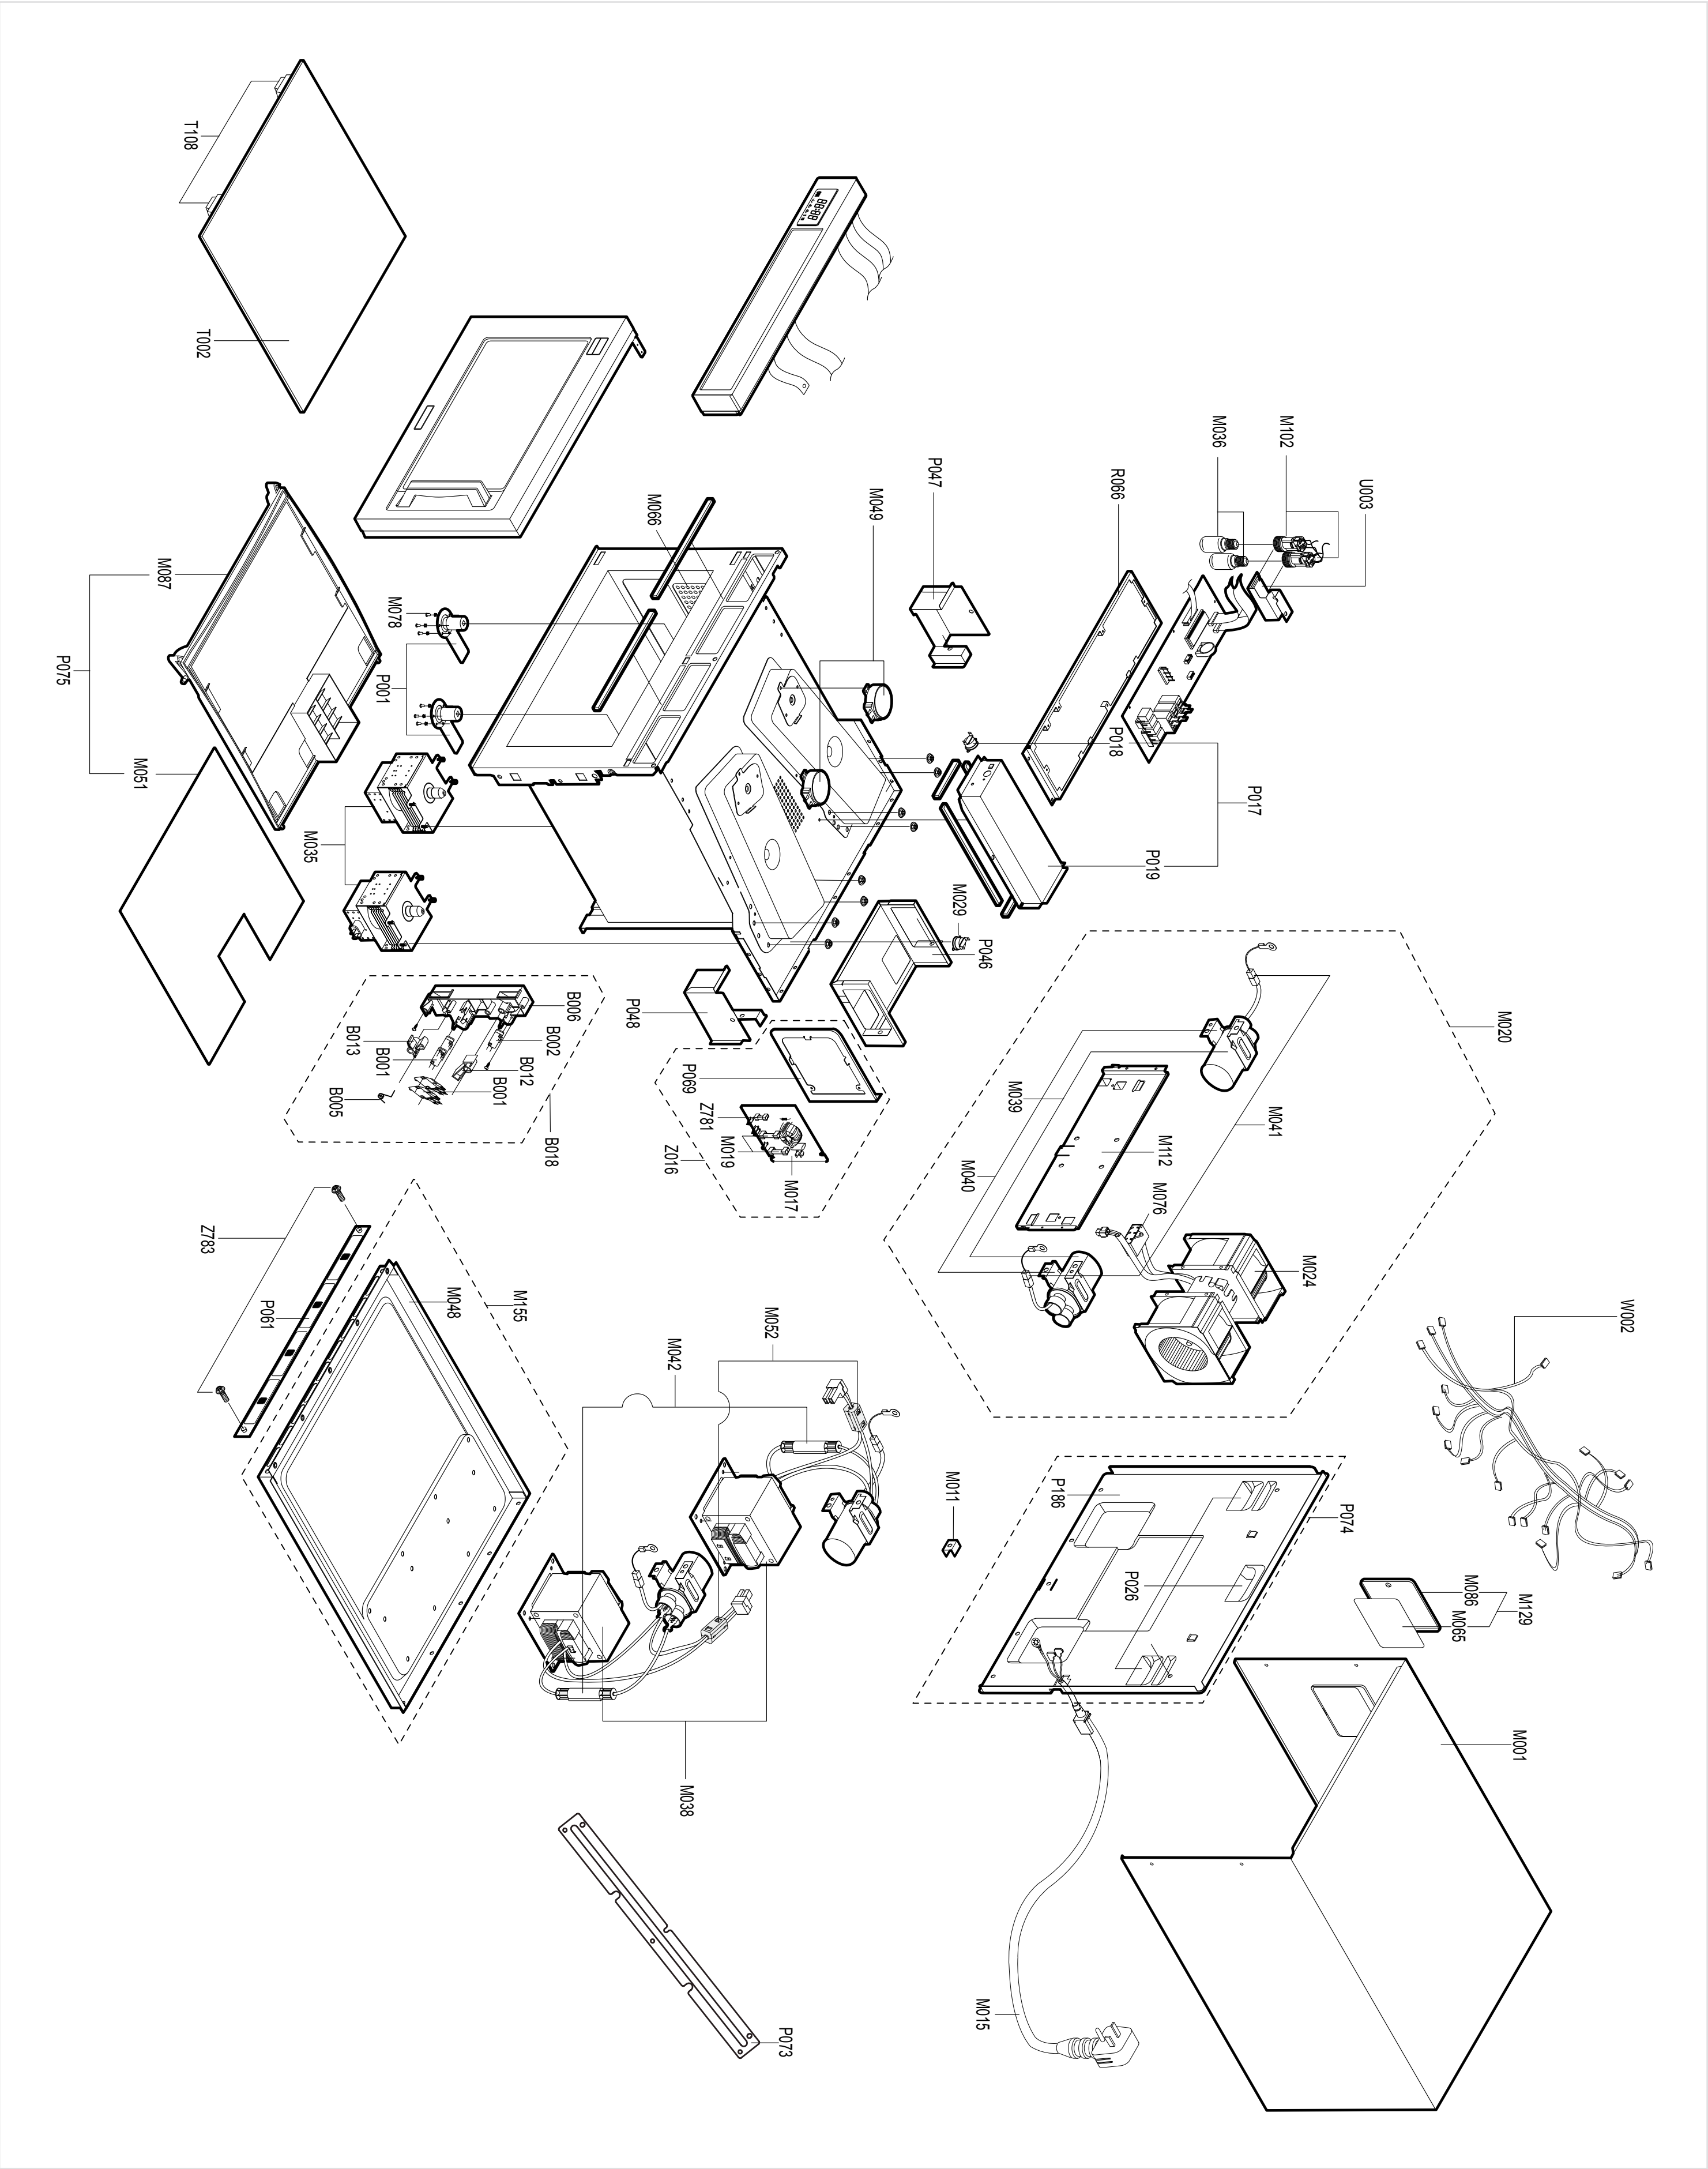

5. Exploded Views and Parts List

5-2 Main Parts List

(S.N.A : SERVICE NOT AVAILABLE)

Level	No.	Code No.	Description	Specification	Q'ty	SA/ SNA	Remark
1-1	M036	4713-000168	LAMP-INCANDESCENT	230V,-,25W,ORG,-,-,-	2	SA	-
1-1	Z783	6011-001140	BOLT-STUD	M4,L8,NI PLT,BSW	2	SNA	-
1-1	M066	DE01-00095A	FILM-LAMP	-,PET,-,84,T0.15,114,CM-1819,-	1	SA	-
1-1	M035	DE03-00009A	MAGNETRON	2M244-M12E,1KW/2460MHZ,3.15V/4	2	SA	-
1-1	M038	DE26-00058A	TRANS H.V	SHV-906EG1,230/240V,50HZ,2425V	2	SA	-
1-1	M049	DE31-10164B	MOTOR SYNCHRONOUS	M2CK34A709-H(B),120V60	2	SA	-
1-1	M029	DE47-20017A	THERMOSTAT	PW-2N(150/60,187Z),250V/7.5A,	1	SA	-
1-1	M102	DE47-40029A	SOCKET-LAMP	250V2A,22.23,E14,BJB,-,-,-	2	SA	-
1-1	R066	DE61-50520A	BRACKET-PCB	-,SECC,T0.8,CM-1819,-,-,-	1	SNA	-
1-1	P073	DE61-50538A	BRACKET-PLATE	-,SECC,T1.0,-,-,-,-	1	SNA	-
1-1	M011	DE61-50541A	BRACKET-EARTH	-,SGCC2,T1.0,W15,L8,-,-	1	SNA	-
1-1	U003	DE61-90318A	HOLDER-LAMP	W134,SECC,-,W134,L40.5,-,L40	1	SA	-
1-1	M078	DE69-90054A	CLIP-STIRRER	5MM,PFA,CM1819/29,-,	6	SNA	-
1-1	M001	DE70-30123A	PANEL-OUTER	-,STS430,T0.6,CM-1819,-,-,-,	1	SA	-
1-1	P046	DE72-50088A	DUCT-FAN	-,ALCOAT,T0.5,CM-1819,-,-,-	1	SNA	-
1-1	P048	DE72-50089A	DUCT-MGT/R	-,SECC,T0.5,CM-1819,-,-,-	1	SNA	-
1-1	P047	DE72-50090A	DUCT-MGT/L	CM-1819,SECC,T0.5,-,-,-,-	1	SA	-
1-1	M052	DE73-90027A	FERRITE-CORE	NI-ZN,T13.8,W21.0,L28.0,BNF	2	SNA	H.V.T
1-1	M020	DE91-50093P	ASSY-MOTOR FAN	-,240V,-,CM1319/1329,COMM	1	SA	CM1329A
1-1	M020	DE91-50093R	ASSY-MOTOR FAN	-,240V,-,CM1619/1629,COMM	1	SNA	CM1629A
1-1	M020	DE91-50093T	ASSY-MOTOR FAN	-,240V,-,CM1919/1929,COMM	1	SA	CM1929A
1-2	M076	2301-001204	C-FILM,LEAD-PEF	1.50UF,-5TO+10%,450VAC,-	1	SNA	-
1-2	M039	2501-001277	C-OIL	0.80UF,2100V(CLASS P),AL CAN T	2	SA	CM1329A
1-2	M039	2501-001282	C-OIL	1.00UF,2100V(CLASS P),AL CAN T	2	SA	CM1629A
1-2	M039	2501-001284	C-OIL	1.10UF,2100V(CLASS P),AL CAN T	2	SA	CM1929A
1-2	M024	DE31-10180A	MOTOR VENTILATION	SMV-1829EA,240V50HZ,22	1	SA	-
1-2	M040	DE61-00421A	BRACKET-HVC	CM1829,SECC,T0.8,-,-,-,-	2	SA	-
1-2	M112	DE61-30189A	SUPPORT-FAN-MOUNT	-,SECC,T1.0,CM-1819,-,	1	SA	-
1-2	M041	0402-001554	HVDIODE-RECTIFIER	HV03-12T01,12000V,0.4A	2	SA	ASSY FAN MOTOR
1-1	M042	DE91-70061A	ASSY-H.V.FUSE	THV060T-0800-H,5KV/0.80A,W	2	SA	-
1-1	P074	DE92-90514A	ASSY-BACK COVER	CM-1819,CM-1829,-,-,-,-	1	SA	-
1-2	P186	DE71-60421A	COVER-BACK	-,SECC,T0.6,W481.8,L363.9,-,C	1	SNA	-
1-2	P026	DE72-50087A	DUCT-EXHAUST	-,ALCOAT,T0.6,-,-,-,-	3	SNA	-
1-1	P001	DE92-90515A	ASSY-STIRRER	CM-1819,CM-1829,-,-,-,-	2	SA	-
1-1	P061	DE92-90516B	ASSY-BRACKET FILTER	CM1819,-,-,-,-,-	1	SA	-
1-1	P017	DE92-90519A	ASSY-DUCT AIR	CM1819/29,-,-,CM1819/29,-,	1	SA	-
1-2	P018	DE47-20169A	THERMOSTAT	PW-2N(100/60,H,23.8,250V/7.5A	1	SA	-
1-2	P019	DE72-50091A	DUCT-OVEN	-,STS430,T0.4,CM-1819,-,-,-	1	SA	-
1-1	Z016	DE92-90521D	ASSY-FILTER	COMM-BONN,NEW BKT SUPPORT,-,	1	SA	-
1-2	P069	DE61-00723A	BRACKET-SUPPORT	CM1319,SECC/ALCOAT,T0.6,	1	SNA	-
1-2	M017	DE91-40105A	ASSY NOISE FILTER	SN-1829,230V/50HZ,-,-,	1	SA	-
1-3	M019	3601-000448	FUSE-CARTRIDGE	250V,10A,SLOW-BLOW,CERAMI	2	SA	-
1-3	Z781	3601-001126	FUSE-CARTRIDGE	250V,1.6A,FAST-ACTING,CER	1	SA	-

5. Exploded Views and Parts List


5-2 Main Parts List

(S.N.A : SERVICE NOT AVAILABLE)

Level	No.	Code No.	Description	Specification	Q'ty	SA/ SNA	Remark
1-1	M129	DE92-90533A	ASSY-LAMP HOLDER	CM1819/CM1829,-,-,-,-,-	1	SA	-
1-2	M065	DE63-90190B	CUSHION-LAMP	CM1819/29,PUT-FOAM,T7.0,W10	1	SNA	-
1-2	M086	DE71-60422A	COVER-LAMP	-,STS430,T0.6,CM-1819,-,-,-,-,-	1	SNA	-
1-1	M155	DE93-10106C	ASSY BASE PLATE	CM1819,SECC	1	SA	-
1-2	M048	DE80-10113C	BASE-PLATE	CM1819,SECC1,-,-,-,-,-	1	SNA	-
1-1	B018	DE93-20097E	ASSY BODY LATCH	CM1819/1829,EUROPE	1	SA	-
1-2	B002	3405-001032	SWITCH-MICRO	125/250VAC,16A,200GF,SPDT	2	SA	-
1-2	B001	3405-001034	SWITCH-MICRO	125/250VAC,16A,200GF,SPST-N	1	SA	-
1-2	B001	3405-001055	SWITCH-MICRO	125/250VAC,16A,200GF,SPST-N	2	SA	-
1-2	B005	DE61-00066A	SPRING-Q	CM1819/1829,MSWR,PI0.8,-,-,-,-,-	1	SA	-
1-2	B006	DE66-40062A	LATCH-BODY	-,,-,-,-,-,-,-	1	SA	-
1-2	B012	DE66-90107A	LEVER-SWITCH(U)	PBT,CM-1819,-,-,-,-,-,-	1	SA	-
1-2	B013	DE66-90108A	LEVER-SWITCH(L)	PBT,CM-1819,-,-,-,-,-,-	1	SA	-
1-1	W002	DE96-00503A	ASSY-WIRE HARNESS A	CM1929,230V 50HZ VI	1	SA	-
1-1	M015	DE96-00639B	ASSY POWER CORD	CEE(F),CEE,250V/15A,2200	1	SA	-
1-1	T002	DE97-00319A	ASSY-TRAY CERAMIC	CM1829,-,-,-,-,-	1	SA	-
1-2	T108	DE61-00170A	FOOT-TRAY	CM1049,URETHANE,-,WHT,-,-,-,-	2	SNA	-
1-2	T002	DE74-20116A	TRAY-CERAMIC	CERAMIC,T3.0,-,-,-,-	1	SNA	-
1-1	P075	DE97-00562A	ASSY-COVER PANEL	CM1019,PP+SGL,-,-,-,-,-	1	SA	-
1-2	M087	DE63-00315A	COVER-STIRRER	CM1019,PP,-,-,-,-,-,NATUAL	1	SNA	-
1-2	M051	DE63-00324A	COVER-CEILING	CM1019,SGL(SILCON GLASS LA	1	SNA	-

5. Exploded Views and Parts List

5-3 Door Parts List

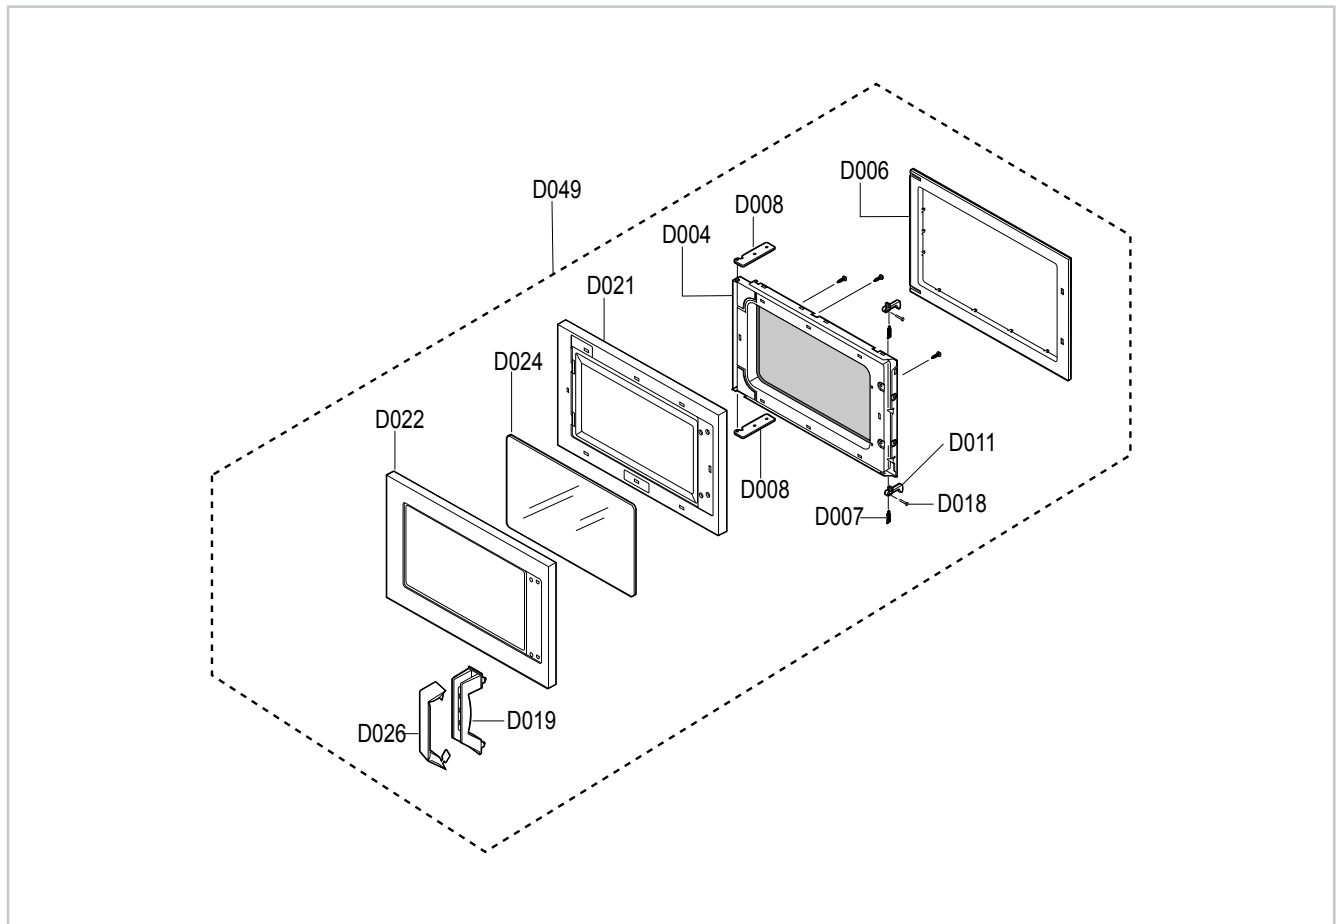


(S.N.A : SERVICE NOT AVAILABLE)

Level	No.	Code No.	Description	Specification	Q'ty	SA/SNA	Remark
1-1	D049	DE92-40195V	ASSY DOOR	CM1329,STS,1300W	1	SA	CM1329A
1-1	D049	DE92-40195Z	ASSY DOOR	CM1629,STS,1600W	1	SA	CM1629A
1-1	D049	DE94-01286D	ASSY DOOR	CM1929,STS,1900W	1	SA	CM1929A
1-2	D018	DE60-60080A	PIN-KEY	A,M3.95,L21,STS304,-,CM-1819,-	2	SA	DOOR-E
1-2	D007	DE61-70144A	SPRING-KEY	-,HSWR,PI1.0,-,OD6.5,L32.8,21	2	SA	-
1-2	D008	DE61-80138A	HINGE	-,SHV-945EG1,KEC,T3.0,W24.5,L2	2	SNA	-
1-2	D019	DE64-20123A	HANDLE	CM-1819,ZN-DICASTING,-,-,-,C	1	SA	-
1-2	D006	DE64-40298A	DOOR-C	-,PP,-,-,-,-,-	1	SA	-
1-2	D021	DE64-90145A	DECORATION-DOOR	-,ABS,CM-1819,-,-,-,CM-1	1	SA	-
1-2	D022	DE64-90146A	DECORATION-COV/DOOR	-,STS,CM-1819,-,-,-,	1	SA	-
1-2	D024	DE67-20174F	SCREEN-DOOR(B)	CM1419,GLASS,T3.2,W198.5,	1	SA	CM1329A
1-2	D024	DE67-20174J	SCREEN-DOOR(B)	CM1629,GLASS,3.2,198.5,36	1	SA	CM1629A
1-2	D024	DE67-20174N	SCREEN-DOOR(B)	CM1929,GLASS,3.2,198.5,36	1	SA	CM1929A
1-2	D026	DE71-60433A	COVER-HANDLE	-,STS430,T0.5,CM-1819,-,-,-	1	SA	-
1-2	D004	DE92-50132B	ASSY DOOR-E	CM-1819,COATING,BLK	1	SA	-
1-2	D011	DE64-40296B	DOOR-KEY	CMO COMMERCIAL,CR3C + ZINC DIE	2	SA	-

5. Exploded Views and Parts List

5-4 Control Parts List

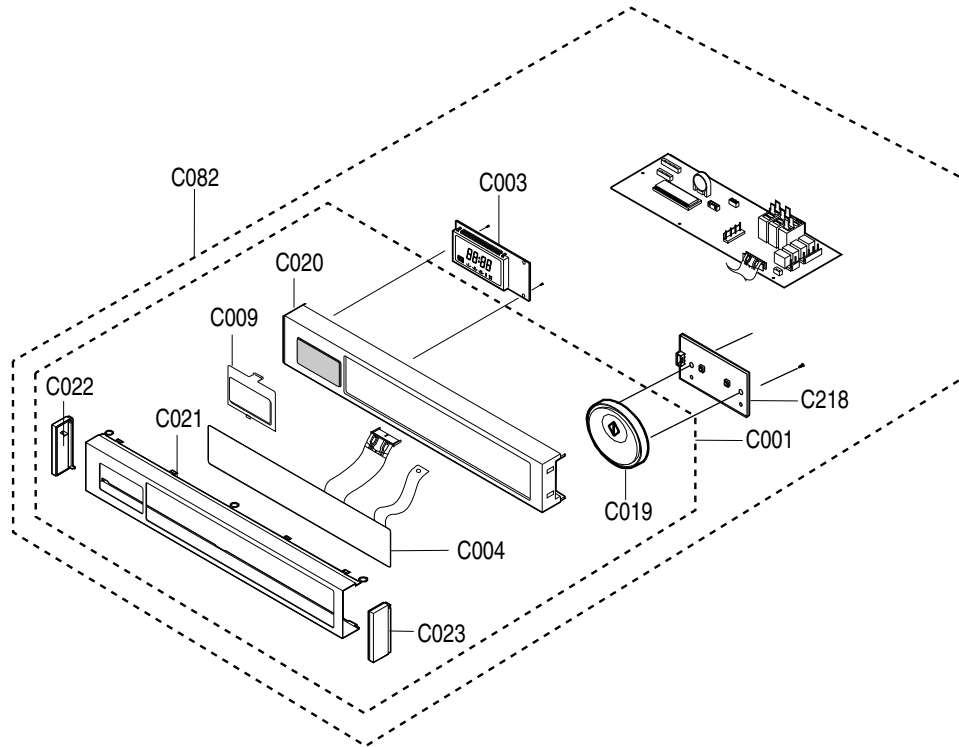

(S.N.A : SERVICE NOT AVAILABLE)

Level	No.	Code No.	Description	Specification	Q'ty	SA/SNA	Remark
1-1	C082	DE93-30442R	ASSY CONTROL-BOX	-,CM1329,-,COMMERCIAL	1	SA	CM1329A
1-1	C082	DE93-30442S	ASSY CONTROL-BOX	-,CM1629,-,COMMERCIAL	1	SA	CM1629A
1-1	C082	DE93-30442T	ASSY CONTROL-BOX	-,CM1929,-,COMMERCIAL	1	SA	CM1929A
1-2	C001	DE93-30529N	ASSY CONTROL-PANEL	-,CM1329,-,COMMERCIAL	1	SA	-
1-3	C004	DE34-00158A	SWITCH MEMBRANE	CM1929/XEU,COMMERCIAL,-,	1	SA	-
1-3	C009	DE67-40161A	WINDOW-DISPLAY	-,RESIN-PMMA,82555,CM-181	1	SA	-
1-3	C020	DE70-30125A	PANEL-BASE	-,RESIN-ABS,TC,CM-1829,-,-,-,	1	SNA	-
1-3	C021	DE71-60426A	COVER-PANEL	-,STS430,T0.5,TC,CM-1829,-,-	1	SA	-
1-3	C022	DE71-60428B	COVER-PANEL(L/L)	CM1019,ABS,-,-,-,-,-,CM	1	SA	-
1-3	C023	DE71-60429B	COVER-PANEL(L/R)	CM1019,ABS,-,-,-,-,-,CM	1	SA	-
1-3	C019	DE66-20212A	BUTTON-START	-,NI,CR-PLATING,-,-,CM-18	1	SA	-
1-2	C218	DE61-00808A	GUIDE-START-BUTTON	CM1019,PP(TB53),-,-,-	1	SNA	START / STOP PCB
1-2	C003	RCS-D2CM-11	ASSY PCB PARTS	CM1229 , 230V50HZ	1	SA	CM1329A
1-2	C003	RCS-D2CM-03	ASSY PCB PARTS	CM1429 , 230V50HZ	1	SA	CM1629A
1-2	C003	RCS-D2CM-01	ASSY PCB PARTS	CM1829 , 230V50HZ	1	SA	CM1929A

5. Exploded Views and Parts List

5-5 Standard Parts List

(S.N.A : SERVICE NOT AVAILABLE)

(CM1319)

Level	Code No.	Description	Specification	Q'ty	SA/ SNA	Remark
1-1	6002-000630	SCREW-TAPPING	PH,+,2S,M3,L8,ZPC(YEL),SWR	1	SNA	MAIN PCB
1-1	6002-001325	SCREW-TAPPING	TH,TORX,2S,M4,L12,ZPC(YEL)	1	SA	-
1-1	6002-001326	SCREW-TAPPING	OH,+,1,M4,L8,NI PLT	3	SNA	OUT PANEL SIDE
1-1	6006-001170	SCREW-ASSY TAPP	WS,TH,+,M4,L10,ZPC(YEL)	3	SNA	S/MEM
1-1	6006-001176	SCREW-ASSY TAPT	WT,PH,+,M4,L8,ZPC(YEL)	6	SNA	DUCT-MGT-R
1-1	6011-001140	BOLT-STUD	M4,L8,NI PLT,BSW	1	SNA	-
1-1	DE60-10080A	SCREW-WASHER	-, -, -, M5,L12, -, 2S, -, -	1	SA	HVT
1-1	DE60-10082I	SCREW-A	-, -, -, 2S-4X10,FEFZY, -, -, -, -	3	SNA	O/P
1-1	DE60-10199A	SCREW-WASHER	-,MSWR18C,4,L10,TH(WASHER),	8	SA	SUP-FAN
1-1	DE60-20014A	BOLT-FLANGE	M5,L10,MSWR3,FEFZY, -, -, -, -	2	SA	HINGE UPPER
1-1	DE60-30015A	NUT-FLANGE	M5,P0.8,MSWR10,FEFZY, -, -, -, -	1	SA	MGT
1-2	6006-001176	SCREW-ASSY TAPT	WT,PH,+,M4,L8,ZPC(YEL)	1	SNA	-
1-2	DE60-10082I	SCREW-A	-, -, -, 2S-4X10,FEFZY, -, -, -, -	2	SNA	VENT-MOTOR
1-2	6006-001170	SCREW-ASSY TAPP	WS,TH,+,M4,L10,ZPC(YEL)	1	SNA	HANDLE
1-2	6001-000033	SCREW-MACHINE	TH,+,M4,L10, -, STS304, -	1	SNA	-
1-2	6002-000239	SCREW-TAPPING	TH,+,2S,M4,L8,ZPC(YEL),SM2	1	SNA	DECORATION
1-2	DE60-10045A	SCREW-TAP PH	-, -, FEFZY, -, PH,M3, -, L6, -, -	1	SA	TCO-DUCT
1-2	6002-000630	SCREW-TAPPING	PH,+,2S,M3,L8,ZPC(YEL),SWR	1	SNA	-
1-2	6002-000630	SCREW-TAPPING	PH,+,2S,M3,L8,ZPC(YEL),SWR	1	SNA	PCB
1-2	6002-001237	SCREW-TAPPING	PWH,+,2,M3,L12,ZPC(YEL),SW	1	SNA	GUIDE START BUTTON

(S.N.A : SERVICE NOT AVAILABLE)

(CM1619)

Level	Code No.	Description	Specification	Q'ty	SA/ SNA	Remark
1-1	6002-000630	SCREW-TAPPING	PH,+,2S,M3,L8,ZPC(YEL),SWR	4	SA	MAIN PCB
1-1	6002-001325	SCREW-TAPPING	TH,TORX,2S,M4,L12,ZPC(YEL)	2	SA	-
1-1	6002-001326	SCREW-TAPPING	OH,+,1,M4,L8,NI PLT	10	SNA	BASE,COVER-LAMP,OUT PANEL SIDE
1-1	6006-001170	SCREW-ASSY TAPP	WS,TH,+,M4,L10,ZPC(YEL)	3	SA	BKT-EARTH,P/C EARTH,S.MEM.EARTH
1-1	6006-001176	SCREW-ASSY TAPT	WT,PH,+,M4,L8,ZPC(YEL)	8	SNA	BKT-HIN-L,BKT-HIN-U,BKT-MOTOR,DUCT-FAN,D
1-1	6011-001140	BOLT-STUD	M4,L8,NI PLT,BSW	2	SNA	-
1-1	DE60-10080A	SCREW-WASHER	-, -, -, M5,L12, -, 2S, -, -	8	SA	HVT
1-1	DE60-10082I	SCREW-A	-, -, -, 2S-4X10,FEFZY, -, -, -, -	10	SA	BODY-LATCH,C-PANEL,O/P
1-1	DE60-10199A	SCREW-WASHER	-,MSWR18C,4,L10,TH(WASHER),	17	SA	BACK COVER,BKT-PCB,BRACKET HOLDER LAMP,D
1-1	DE60-20014A	BOLT-FLANGE	M5,L10,MSWR3,FEFZY, -, -, -, -	5	SA	HINGE DOOR LOWER,HINGE UPPER
1-1	DE60-30015A	NUT-FLANGE	M5,P0.8,MSWR10,FEFZY, -, -, -, -	8	SA	MGT
1-2	6006-001176	SCREW-ASSY TAPT	WT,PH,+,M4,L8,ZPC(YEL)	4	SNA	HVD,HVC
1-2	DE60-10082I	SCREW-A	-, -, -, 2S-4X10,FEFZY, -, -, -, -	5	SA	C-FILM,VENT-MOTOR
1-2	6006-001170	SCREW-ASSY TAPP	WS,TH,+,M4,L10,ZPC(YEL)	2	SA	-
1-2	6002-000239	SCREW-TAPPING	TH,+,2S,M4,L8,ZPC(YEL),SM2	3	SNA	DECORATION
1-2	6001-000033	SCREW-MACHINE	TH,+,M4,L10, -, STS304, -	2	SNA	-
1-2	DE60-10045A	SCREW-TAP PH	-, -, FEFZY, -, PH,M3, -, L6, -, -	1	SA	TCO-DUCT
1-2	6002-000630	SCREW-TAPPING	PH,+,2S,M3,L8,ZPC(YEL),SWR	2	SA	-
1-2	6002-000630	SCREW-TAPPING	PH,+,2S,M3,L8,ZPC(YEL),SWR	2	SA	PCB
1-2	6002-001237	SCREW-TAPPING	PWH,+,2,M3,L12,ZPC(YEL),SW	2	SNA	GUIDE START BUTTON

5. Exploded Views and Parts List

5-5 Standard Parts List


(S.N.A : SERVICE NOT AVAILABLE)

(CM1919)

Level	Code No.	Description	Specification	Q'ty	SA/ SNA	Remark
1-1	6002-000630	SCREW-TAPPING	PH,+,2S,M3,L8,ZPC(YEL),SWR	4	SA	MAIN PCB
1-1	6002-001325	SCREW-TAPPING	TH,TORX,2S,M4,L12,ZPC(YEL)	2	SA	-
1-1	6002-001326	SCREW-TAPPING	OH,+,1,M4,L8,NI PLT	10	SNA	BASE,COVER-LAMP,OUT PANEL SIDE
1-1	6006-001170	SCREW-ASSY TAPP	WS,TH,+,M4,L10,ZPC(YEL)	3	SA	BKT-EARTH,P/C EARTH,S.MEM.EARTH
1-1	6006-001176	SCREW-ASSY TAPT	WT,PH,+,M4,L8,ZPC(YEL)	8	SNA	BKT-HIN-L,BKT-HIN-U,BKT-MOTOR,DUCT-FAN,D
1-1	6011-001140	BOLT-STUD	M4,L8,NI PLT,BSW	2	SNA	-
1-1	DE60-10080A	SCREW-WASHER	-, -, -, -, M5,L12, -, 2S, -, -	8	SA	HVT
1-1	DE60-10082I	SCREW-A	-, -, -, -, 2S-4X10,FEFZY, -, -, -, -	12	SA	BODY-LATCH,C-PANEL,O/P
1-1	DE60-10199A	SCREW-WASHER	-,MSWR18C,4,L10,TH(WASHER),	17	SA	BACK - COVER,BKT LAMP HOL&BKT PCB,BKT-PC
1-1	DE60-20014A	BOLT-FLANGE	M5,L10,MSWR3,FEFZY, -, -, -, -, -	5	SA	HINGE DOOR LOWER,HINGE UPPER
1-1	DE60-30015A	NUT-FLANGE	M5,P0.8,MSWR10,FEFZY, -, -, -, -, -	8	SA	MGT
1-2	6006-001176	SCREW-ASSY TAPT	WT,PH,+,M4,L8,ZPC(YEL)	4	SNA	HVD,HVC
1-2	DE60-10082I	SCREW-A	-, -, -, -, 2S-4X10,FEFZY, -, -, -, -	5	SA	C-FILM,VENT-MOTOR
1-2	6006-001170	SCREW-ASSY TAPP	WS,TH,+,M4,L10,ZPC(YEL)	2	SA	-
1-2	6001-000033	SCREW-MACHINE	TH,+,M4,L10, -, STS304, -	2	SNA	-
1-2	6002-000239	SCREW-TAPPING	TH,+,2S,M4,L8,ZPC(YEL),SM2	3	SNA	DECORATION
1-2	DE60-10045A	SCREW-TAP PH	-, -, FEFZY, -, PH,M3, -, L6, -, -	1	SA	TCO-DUCT
1-2	6002-000630	SCREW-TAPPING	PH,+,2S,M3,L8,ZPC(YEL),SWR	2	SA	-
1-2	6002-000630	SCREW-TAPPING	PH,+,2S,M3,L8,ZPC(YEL),SWR	2	SA	PCB
1-2	6002-001237	SCREW-TAPPING	PWH,+,2,M3,L12,ZPC(YEL),SW	2	SNA	GUIDE START BUTTON

6-1 PCB Diagrams

(This Document can not be used without Samsung's authorization)

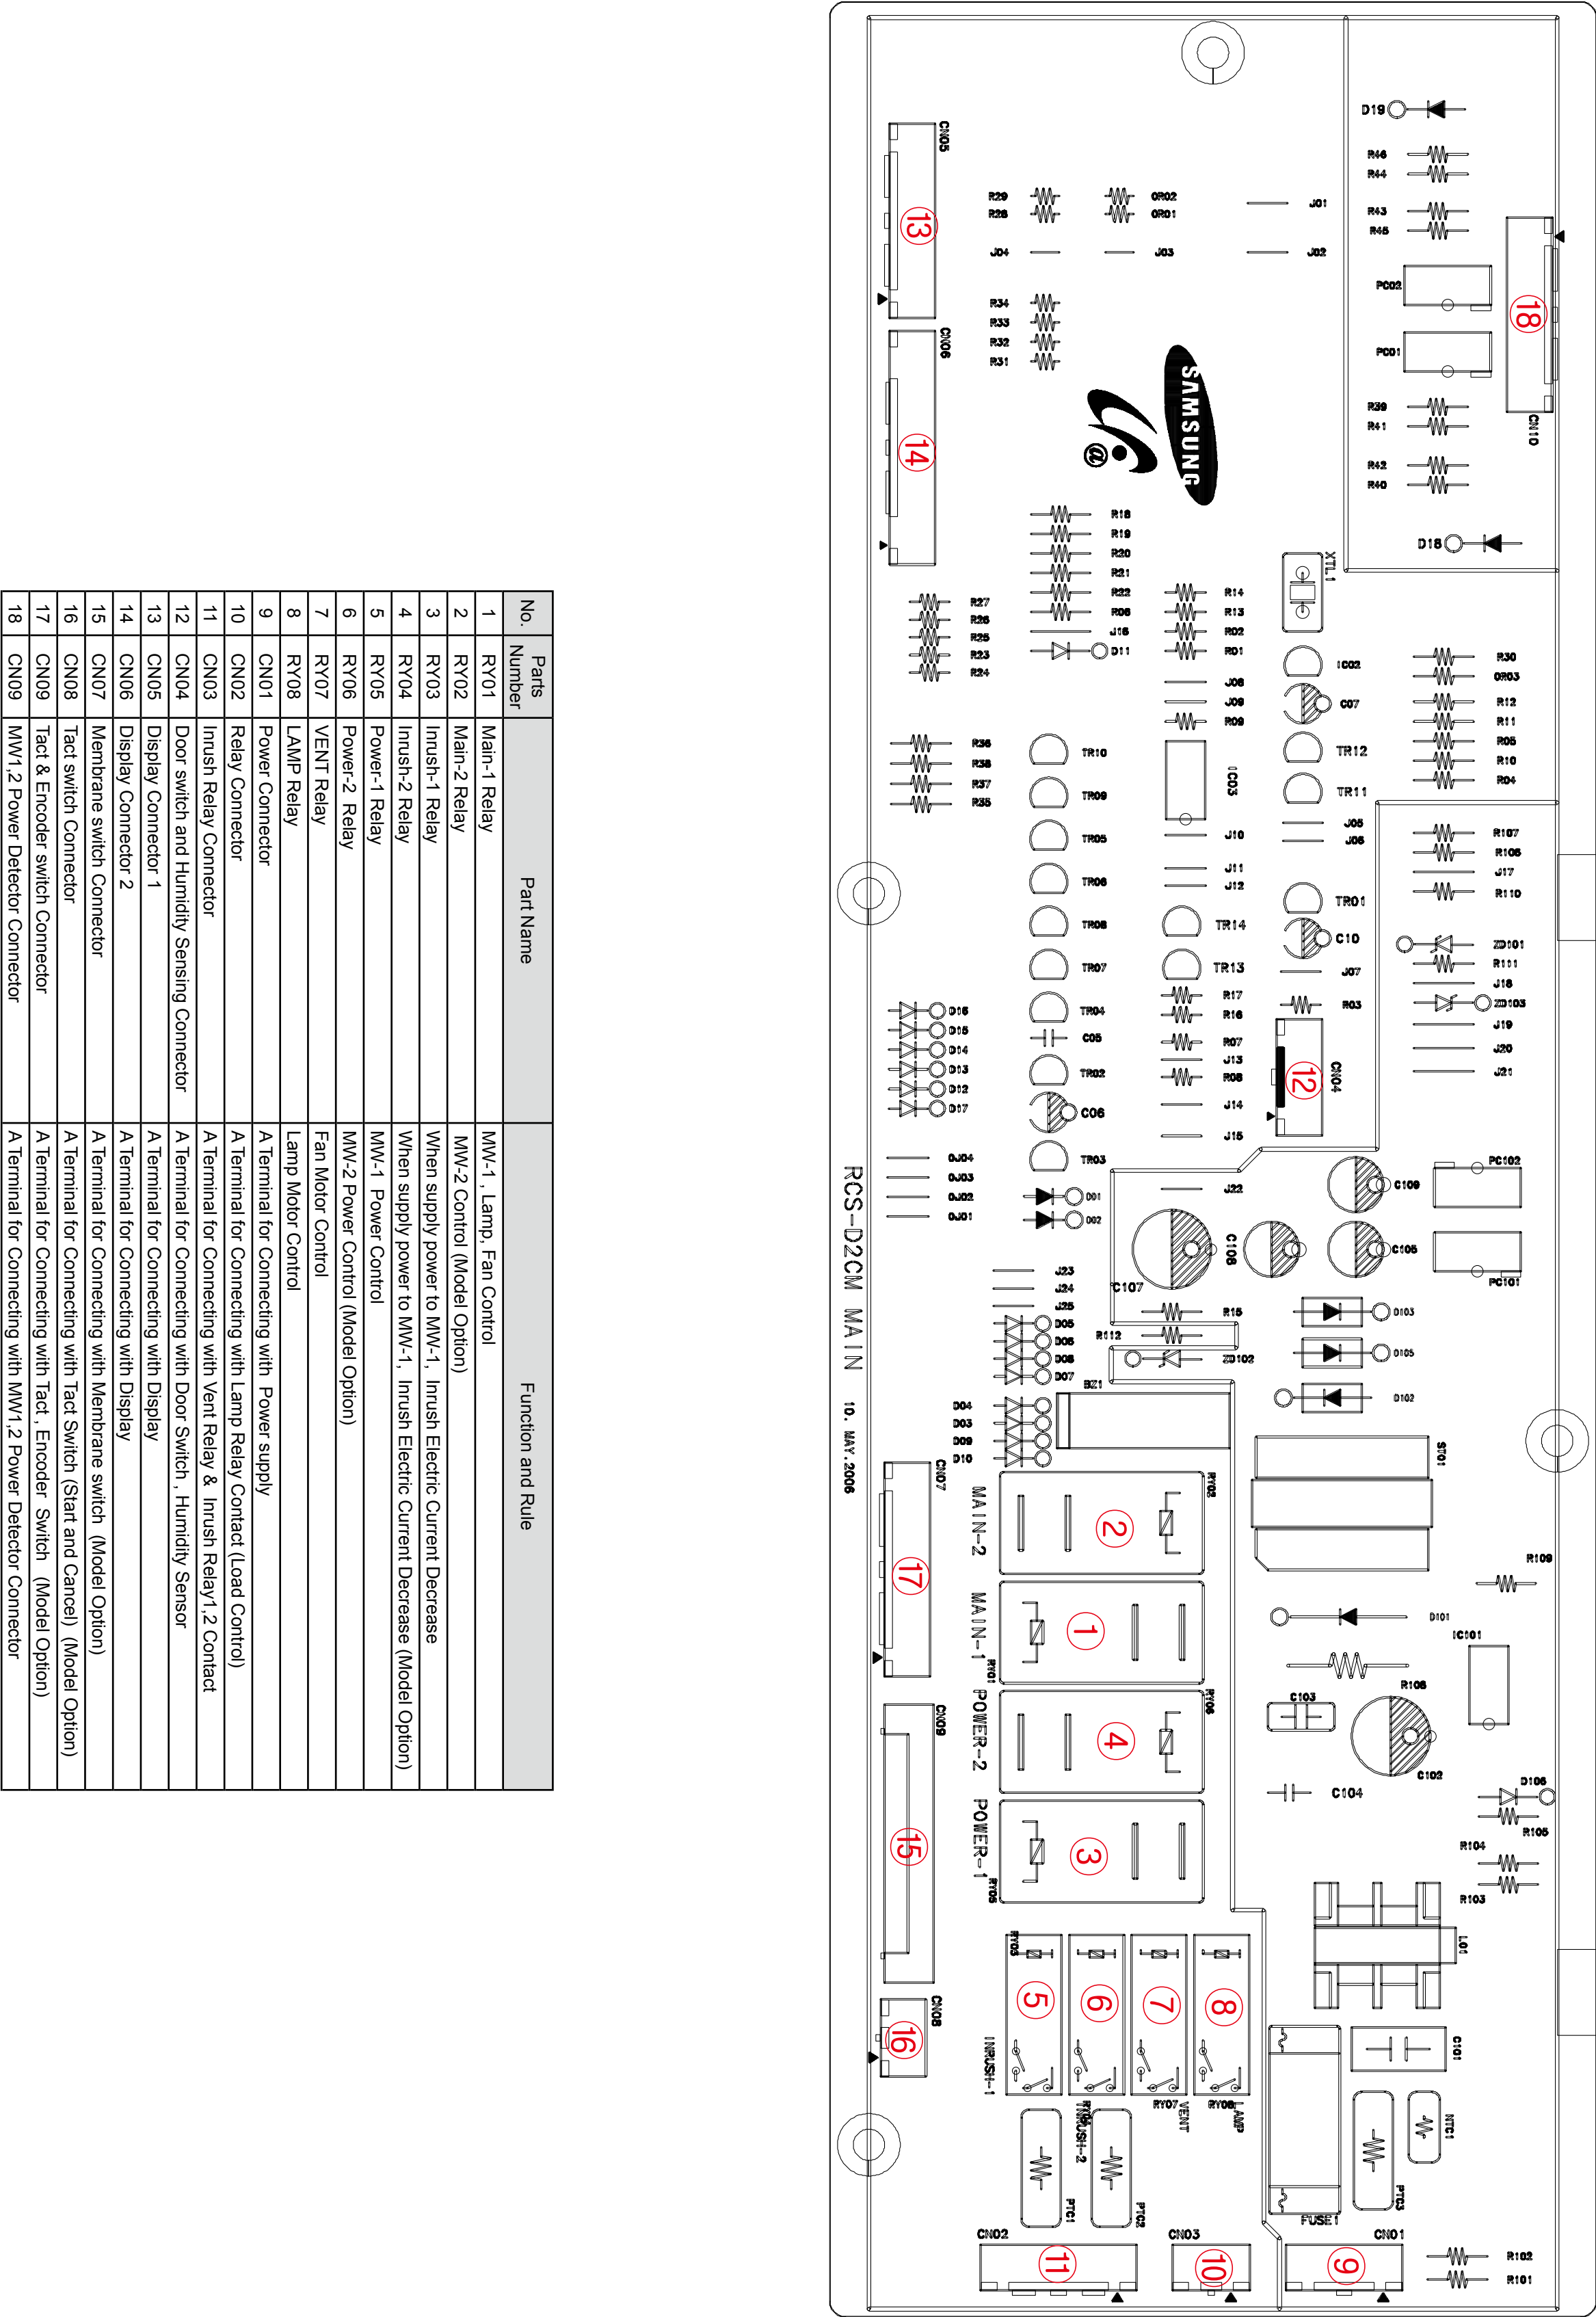

The diagram illustrates the electrical circuit of a microwave oven, divided into two main sections: the primary power and control section (top) and the high-voltage section (bottom).

Primary Power and Control Section (Top):

- Power Cord:** 240V/230V, 50HZ, with lines L, N, and G.
- Fuses:** FUSE 1) 250 V 10 A and FUSE 2) 250 V 10 A.
- Switches:** PRIMARY SWITCH 1) and PRIMARY SWITCH 2).
- Relays:** LAMP RELAY, MOTOR RELAY, INRUSH RELAY 1), INRUSH RELAY 2), and POWER RELAY 1) / POWER RELAY 2).
- Motors:** LAMP * 2 (230V25W), CAP. VENT. MOTOR, AM1 A-MOTOR, and AM2 A-MOTOR.
- Other Components:** RESISTOR, RESISTOR 1), RESISTOR 2), FLAME TCO, MGT TCO, LVT, CEC 1, CEC 2, L1, L2, and MONITOR SWITCH 1) / MONITOR SWITCH 2).
- Wiring:** Color-coded wires include (BRN), (BLU), (WHT), (RED), (ORG), (YEL), (PNK), (GRY), (VIL), and (VIL).

High-Voltage Section (Bottom):


- Transformer:** H.V. T 1) and H.V. T 2).
- Capacitors:** H.V. CAPACITOR 1) and H.V. CAPACITOR 2).
- Fuses:** H.V. FUSE 1) and H.V. FUSE 2).
- Diodes:** H.V. DIODE 1) and H.V. DIODE 2).
- Magnetron:** MAGNETRON 1) and MAGNETRON 2).

NOTE

- DOOR IS OPENED
- :PCB PATTERN

8-1 Schematic Diagrams

(This Document can not be used without Samsung's authorization)

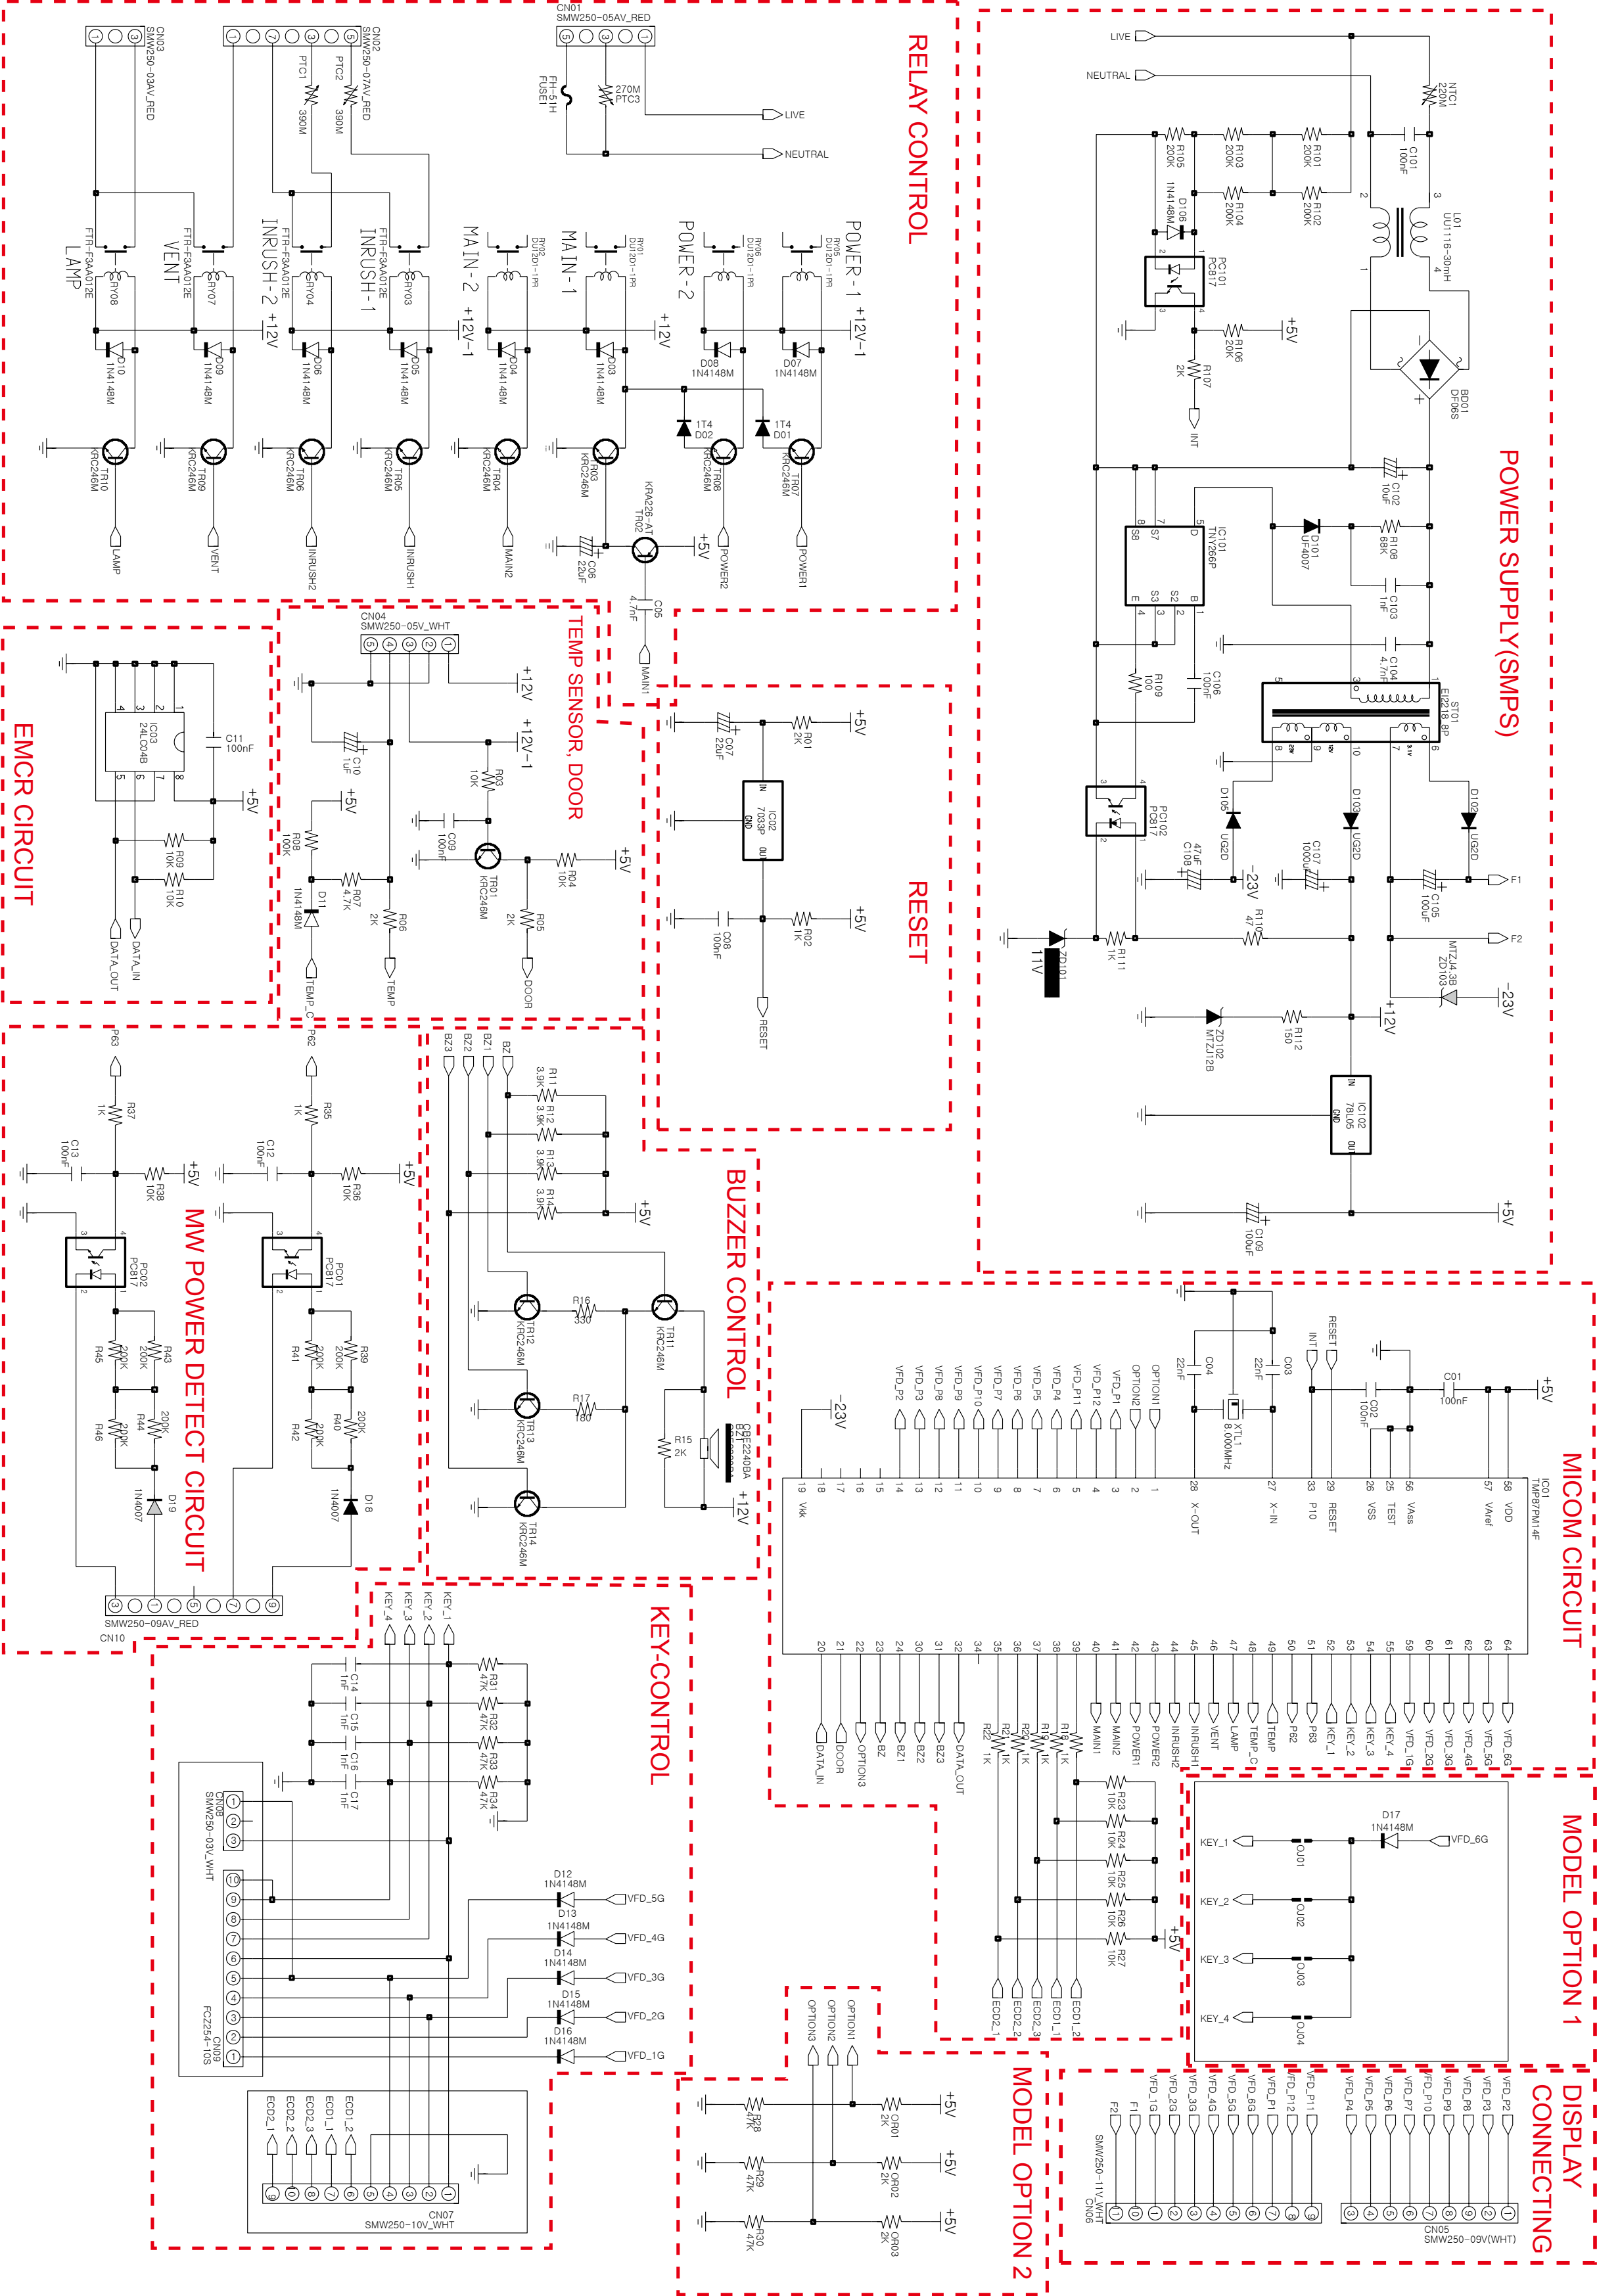



GSPN (Global Service Partner Network)

Contry	Web Site
North America	service.samsungportal.com
Latin America	latin.samsungportal.com
CIS	cis.samsungportal.com
Europe	europe.samsungportal.com
China	china.samsungportal.com
Asia	asia.samsungportal.com
Mideast & Africa	mea.samsungportal.com